

Quick TeeJet® Caps



Color Code

1	2	3	4	5	6	7	8	††	10
Black	White	Red	Blue	Green	Yellow	Brown	Orange	Gray	Violet

Ordering Information


QUICK TEEJET CAPS	PART NUMBER		FOR USE WITH FLAT SPRAY TIPS 300 PSI (20 bar) MAXIMUM PRESSURE
	QUICK TEEJET CAP ONLY	QUICK TEEJET CAP & SEAT GASKET SET	
	CP25611- *-NY	25612- *-NYR	TeeJet Flat Spray Tips (Smaller Capacities)
	CP25609- *-NY	25610- *-NYR	TeeJet Flat Spray Tips (Larger Capacities)
	CP25597- *-NY	25598- *-NYR	TJ TwinJet® AI TeeJet® & AIUB TeeJet® SJ-3 StreamJet® DG TwinJet® Turbo TeeJet Induction®
	CP25595- *-NY	25596- *-NYR	TeeJet Flat Spray Tips (Smaller Capacities) Tips can be positioned in choice of two spray plane directions—parallel or perpendicular to wings of Quick TeeJet cap.
	CP25599- *-NY	25600- *-NYR	Turbo FloodJet® TK-VS FloodJet® Locating Nib VisiFlo® Spray Tip VisiFlo Spray Tip
	CP25607- *-NY	25608- *-NYR	TK FloodJet® FL FullJet® TX ConeJet® TG Full Cone Hose Shank AITXA
	CP25607- *-NY	—	 D-Disc Core Seal — CP18999-EPR (EPDM standard) — CP18999-VI (Viton® optional) Used with DC-Core Inserts and CP4916 Flow Regulators (Insert Core into Seal)
	CP26277-1-NY†	26278-1-NYR†	Ceramic Disc-Core TXB ConeJet® AITXB D-Disc Core
	—	QJ4676-45-1/4-NYR†	45° Quick TeeJet cap
	—	QJ4676-90-1/4-NYR†	90° Quick TeeJet cap
	—	QJ4676-1/8-NYR†	Permits use of standard 1/8" and 1/4" nozzles. Can be used for mounting pressure gauge at the nozzle. See Data Sheet 20055 for more information. (B) = BSPT
	—	QJ(B)4676-1/4-NYR†	
	—	19843-NYR†	Provides shutoff at nozzle for quick spacing change or change in spray swath.

*Specify color code (see chart). Unless otherwise specified, a yellow (6) cap will be supplied. Violet (10) only available in CP25611 and CP25597 Nylon caps.

†These Quick TeeJet caps available only in black.

††Polypropylene Quick TeeJet caps available only in gray.

Quick TeeJet Cap

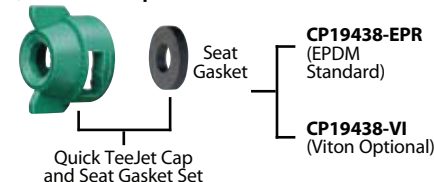

The Quick TeeJet caps are designed with grooves that fit locating lugs on the nozzle body. Caps are made of Nylon and are available for use with all TeeJet® spray tips. Maximum operating pressure of 300 PSI (20 bar).

How to order:

For cap and seat gasket set, specify set number and color code.

Example: 25612-3-NYR
For cap only, specify part number and color code.

Example: CP25597-4-NY

For seat gasket, specify part number.
Example: CP19438-EPR